

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number  
**WO 2005/073125 A1**

(51) International Patent Classification<sup>7</sup>: **B67D 5/34**,  
F16K 31/20, 1/22

(21) International Application Number:  
PCT/GB2005/000213

(22) International Filing Date: 21 January 2005 (21.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0401771.1 28 January 2004 (28.01.2004) GB

(71) Applicant and

(72) Inventor: **GEORGE, James** [GB/GB]; Rye Court,  
Berrow, Nr. Malvern, Worcestershire WR13 6AE (GB).


(74) Agent: **MARKS & CLERK**; 27 Imperial Square, Chel-  
tenham, Gloucestershire GL50 1RQ (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FLOW CONTROL DEVICE

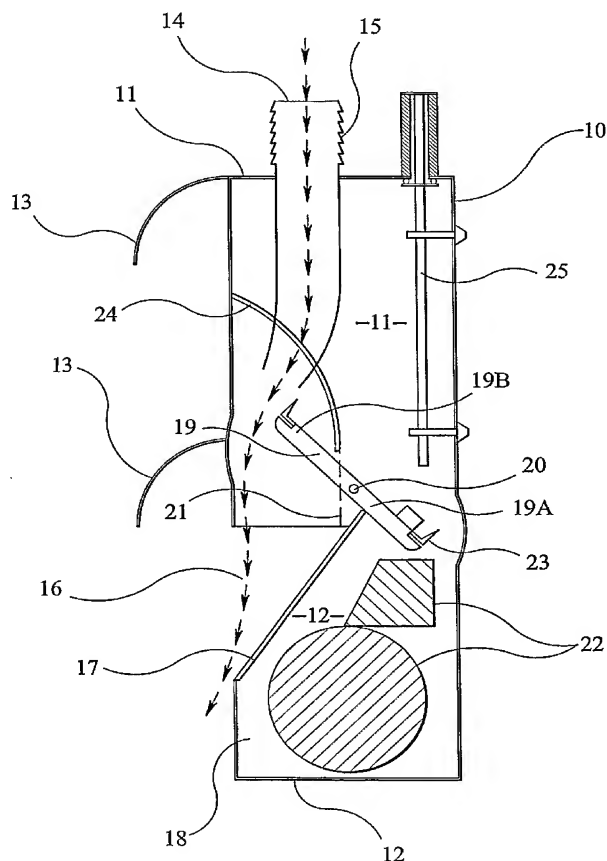

(57) Abstract: A flow control device for dispensing liquid to a predetermined level in a container, comprising a tubular body (10) having a closed upper end (11) and an open lower end (12), an inlet (14) attached to or for attachment to a liquid supply, a flap valve (19) which is pivoted within the body (10) below the inlet (14) about an axis (20) extending transversely to the body (10) and which, in the absence of external forces will adopt an open condition allowing liquid to flow through the body, and float (22) internally positioned within the body for pivoting the flap valve towards a closed condition as the liquid level in the container rises.

WO 2005/073125 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*